

Speed Queen®

MULTI-HOUSING

Quantum® Front Control
Commercial Washers & Dryers

COIN
CARD VEND



BUILT FOR **RELIABLE** PERFORMANCE.

Speed Queen's commitment to multi-housing laundry is unmatched anywhere else in the industry. Built for performance and reliability, our laundry machines maximize your profitability and provide unparalleled convenience for your property.

Speed Queen's line of washers and dryers are ready to meet the demands of your laundry room. They are designed to work as a single or stacked laundry setup, provide maximum energy efficiency and long-lasting performance. Speed Queen front load laundry products have met every design standard to be 100% ADA compliant.

EQUIPPED WITH QUANTUM CONTROLS TO PROVIDE:

Total automated management of your laundry room. Its simple, powerful programming gives you the ability to:

- Easily manage your laundry operation with remote internet access.
- Establish multi-level vend prices, soil level cycles and dryer top-off times on your machines.
- Track coin or card transactions.
- WashAlert™ with Service Alert capable.




ACTIVATION TYPES

Offering a variety of activation types allowing you to tailor your laundry room to fit your needs. Front control models all come with high capacity meter case.



Coin ("C")



Prep for Card ("Y")



Prep for Coin ("X")

FRONT LOAD WASHER



The Speed Queen front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs through advanced programmability.

FEATURES

REVOLUTIONARY BALANCING TECHNOLOGY

Improved out-of-balance technology that uses a redesigned suspension and advanced sensing to manage and redistribute out-of-balanced loads, delivering uninterrupted cycles.

LOW WATER USAGE

Per cycle to reduce operating costs.

HIGH SPEED EXTRACT

1200 RPM final spin exerts 440 G-Force to maximize moisture removal from clothes.

LARGER DOOR OPENING

Extra wide 15.5" (394 cm) for easy loading and unloading of clothes.

STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

FOUR COMPARTMENT SUPPLY DISPENSER

Prewash, wash, fabric softener, bleach.



SINGLE LOAD DRYER



Speed Queen's front control dryer, defined by its simplicity and its performance, provides everything you need to get the job done – and nothing you don't. Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. The perfect balance of heat, airflow and tumble action for optimal performance and efficiency.

FEATURES

SUPERIOR DRYING CONVENIENCE

With a 2.06 sq. ft. (1914 cm²) door opening, making it the widest in the industry, Speed Queen dryers offer the convenience of easy loading and unloading.

UPFRONT LINT FILTER

Easy to clean and secured.

REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.

EFFICIENT DRYER HEATING

25,000 BTU (gas models) and 5,350 Watts (electric models) provide fast drying and lower operating costs.



STACK DRYER


The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models. ADA Compliant (bottom dryer only).



STACK WASHER/DRYER



Speed Queen's stack washer/dryer bring an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on all floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Same great features as the front control washer and dryer for superior washing and drying convenience. ADA Compliant (washer only).

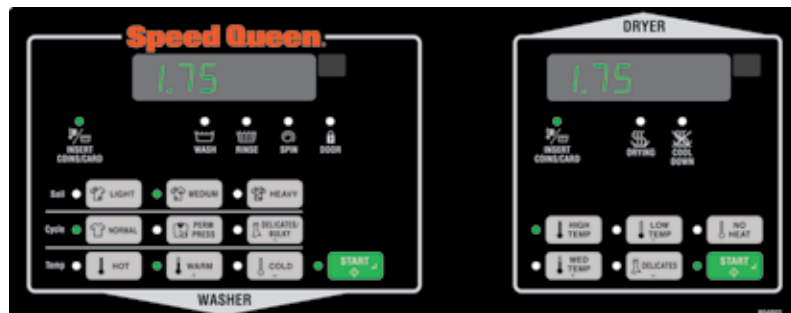

MODELS and ACTIVATION {NOTE: Coin Box Sold Separately}	COIN	Front Load Washer	Single Load Dryer	Stack Dryer	Stack Washer/Dryer
		SFNNCASP113TW01 SFNNCASG113TW01 SFNNCAJP113TW01	Electric 240: SDENCAGS173TW01 Gas: SDGNAGS113TW01	Electric 208: SSENAGS153TW01 240: SDENYAGS173TW01 Gas: SDGNAGS113TW01 Electric 208: SDEWYAGS153TW01 240: SDEWYAGS173TW01 Gas: SDGWYAGS113TW01	Electric 208: SSECAGS153TW01 240: SSECAGS173TW01 Gas: SSECAGW153TW01 240: SSECAGW173TW01 Gas: SSECAGW113TW01 Electric 208: SSENAGS153TW01 240: SSENAGS173TW01 Gas: SSENAGW153TW01 240: SSENAGW173TW01 Gas: SSENAGW113TW01 Electric 240: SSECAGW173TW01 Gas: SSECAGW113TW01 Electric 240: SSECAGW173TW01 Gas: SSECAGW113TW01
	PREP CARD	SFNNYASP113TW01 SFNNYAJ113TW01 SFNNWYASP113TW01 SFNNYBSP113TW01 SFNNYASG113TW01	Electric 208: SDEWYAGS153TW01 240: SDENYAGS173TW01 Gas: SDGNAGS113TW01 Electric 208: SDEWYAGS153TW01 240: SDEWYAGS173TW01 Gas: SDGWYAGS113TW01	Electric 208: SSECAGS153TW01 240: SSECAGS173TW01 Gas: SSECAGW153TW01 240: SSECAGW173TW01 Gas: SSECAGW113TW01 Electric 208: SSENAGS153TW01 240: SSENAGS173TW01 Gas: SSENAGW153TW01 240: SSENAGW173TW01 Gas: SSENAGW113TW01 Electric 240: SSECAGW173TW01 Gas: SSECAGW113TW01 Electric 240: SSECAGW173TW01 Gas: SSECAGW113TW01	Electric 240: STENYASP173TW01 Gas: STGNAYASP113TW01 Electric 240: STEWYASP173TW01 Gas: STGWYASP113TW01
	PREP COIN	SFNNXASP113TW01	--	Electric 240: SSENAGS153TW01 Gas: SSECAGS173TW01	Electric 240: STENXASP173TW01 Gas: STGNXASP113TW01 STGNXASG113TW01
Stainless Basket/Cylinder Volume - cu.ft. (liters)		3.42 (96.8)	7.0 (198)	7.0 (198) ea pocket	3.42 (96.8) 7.0 (198)
Width - in (mm)		26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)		27 3/4 (704)	28 (711)	29 (737)	27 3/4 (704)
Height* - in (mm)		44 3/8 (1126)	44 3/8 (1126)	78 3/16 (1986)	78 3/16 (1986)
Weight - lb (kg)		270 (122.5)	Electric: 150 (68) Gas: 155 (70)	Electric: 265 (120) Gas: 275 (125)	Electric: 390 (177)
Shipping Weight - lb (kg)		290 (131.5)	Electric: 160 (73) Gas: 165 (75)	Electric: 280 (127) Gas: 290 (132)	Electric: 425 (193)
Cycle Time - minutes (default)		27	45	45	27/45
Motor HP (Capacitor Start and Thermal Protected)		0.9 HP 671 W	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	0.9 HP 671 W 1/3 HP, 5.5 amps
Water Consumption - gal (Liter)		11.7 (44.3)	N/A	N/A	11.7 (44.3)
Water Factor - gal/ft³ (Liters/Liter/cycle)		3.8 (0.52)	N/A	N/A	3.8 (0.52)
Modified Energy Factor - ft³/kWh/cycle (Liters/kWh/cycle)		2.98 (84.48)	N/A	N/A	2.98 (84.48)
Average Hot Water Usage - gal (Liter)		0.4 (1.5)	N/A	N/A	0.4 (1.5)
Water Pressure PSI (Bar)		20-120 (1.4-8.3)	N/A	N/A	20-120 (1.4-8.3)
Spin Speed - RPM		500, 800, 1200	N/A	N/A	500, 800, 1200
Cycle/Temperature		Hot Normal Warm Perm Press Cold Delicate	High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat	High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat	See washer and dryer columns for corresponding cycles and temperatures
Electrical Specifications and Circuit Requirements		120/60/1-15 amp	Electric: 120/208/60/1-30 amp 120/240/60/1-30 amp* Gas: 120/60/1-15 amp	Electric: 2 ea 120/208/60/1-30 amp 120/240/60/1-30 amp* Gas: 2 ea 120/60/1-15 amp	See washer and dryer columns for corresponding cycles and temperatures
Btu per Hour (kcal)		N/A	25,000 (6300)	25,000 (6300)	25,000 (6300)
Heating Element**		N/A	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V
Type of Gas (Gas models only)		N/A	Factory-equipped natural/mixed gas convertible to LP gas**	Factory-equipped natural/mixed gas convertible to LP gas**	Factory-equipped natural/mixed gas convertible to LP gas**
Utility Connections - in (mm)		N/A	Gas: 3/8 NPT (9.5)	Gas: 3/8 NPT (9.5)	Gas: 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)		N/A	4 (102)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)†		N/A	220 (105)	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure		N/A	0.6" W.C.	0.6" W.C.	0.6" W.C.
Agency Approval		cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus
Activation		Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op
Top and Lid Finish		Porcelain	Porcelain	N/A	N/A
Colors		White	White	White	White
Door Type		Window	Solid	Solid, Window	Window
Supply Injection		Yes	N/A	N/A	N/A
Drain		Pump or Gravity	N/A	N/A	Pump or Gravity
Wireless Network Board Installed		Yes	Yes	Yes	Yes

* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.

